

E930


EXTRUDER SYSTEM



IT'S ALL ABOUT STRAIGHTNESS


The gearbox shaft centre must coincide with the centre line of the extruder tube. Otherwise the screw at the inlet's end will be pressed against the tube, which will lead to abnormal wear of both screw and tube along with an increased energy consumption. This wear can also result in metal fragments in the produced material. During the alignment procedure we rotate both detector and spindle. This way we can read how the centre line of the spindle is compared to the tube's centre at the inlet end.

It is important that the extruder tube is straight so that the screw does not rest against the tube in any part, which can result in abnormal wear and fragments of metal in produced material. We will also get a more even temperature of produced material which in the end results in a better product.

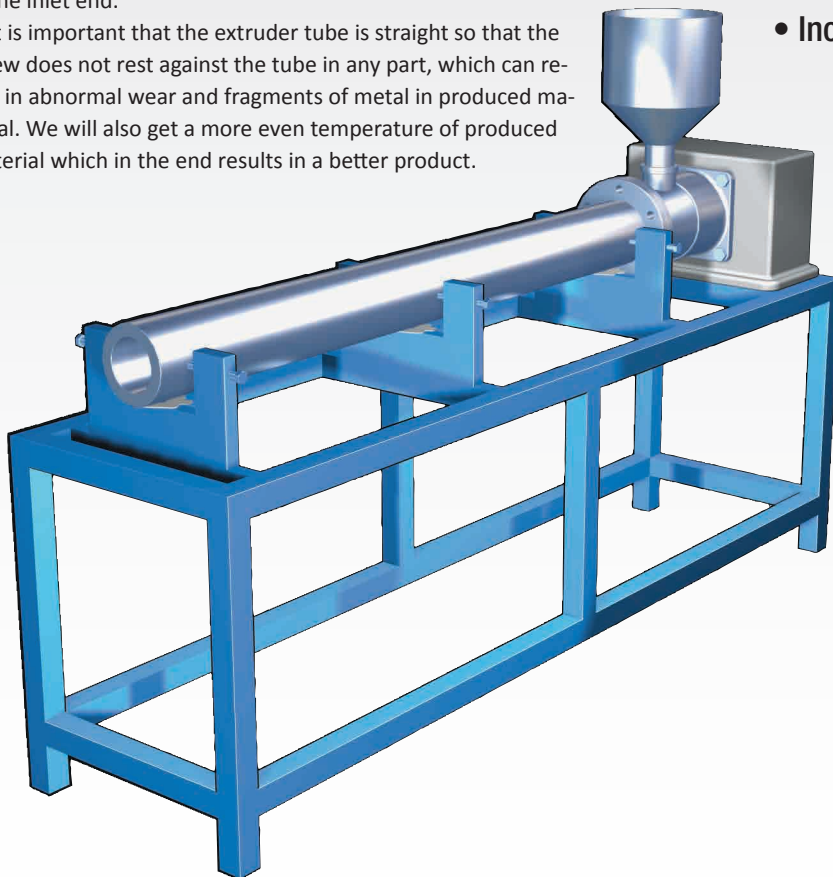

An aligned extrusion machine leads to:

- Less wear on the extruder screw and tube.
- Even quality on the produced material.
- Lower energy consumption.
- Lower consumption of spare parts.
- Increased availability on machine time.

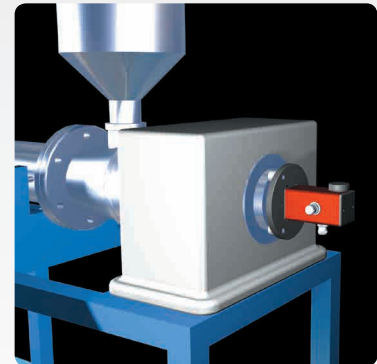

Laser transmitter on the gearbox spindle.



Detector with adapters in the tube.

EXTRUDER ALIGNMENT

Measurement and alignment of extrusion machines.

EASY-LASER®



Laser transmitter D75 has a measurement distance of 40 m [130']. Powered by one 1.5 V R14 (C) battery.

With detector E9 has 2 axis PSD, 360° electronic inclinometer, built-in Bluetooth® wireless technology and rechargeable battery.



QUICK AND ACCURATE MEASUREMENT

The Extruder system E930 is designed to measure straightness and pointing direction, primarily on extruder pipes. Another application can be hydraulic pipes for example. The well-thought-out design of the system ensures that the measurement procedure is quick and accurate. Diameters down to 50 mm [1.97"] can be measured. Working range is up to 40 m [130']. The programs guides you through the measuring procedure, which speeds up the work.

THE FOUR STEPS OF ALIGNMENT

• Alignment of motor – gearbox

The alignment of the transmission between motor and gearbox is performed with for example Easy-Laser® Shaft alignment measuring units (accessories).

• Alignment of the gearbox shaft centre – extruder tube inlet

Alignment of the gearbox shaft centre compared to the centre line of the extruder tube at inlet. Performed with Easy-Laser® Extruder system.

• Alignment of the gearbox shaft centre – extruder tube outlet

Alignment of the gearbox shaft centre compared to the centre line of the extruder tube at outlet. Performed with Easy-Laser® Extruder system.

• Straightness measurement of the extruder tube

Performed with Easy-Laser® Extruder system.

DOCUMENTATION

You have many possibilities for documentation of the results:

- Save in the Display unit. A PDF is automatically produced.
- Send data to PC. Data base program EasyLink™ for PC is included.
- Print outs (printer is accessory).

EXPANDABLE

Since all programs are included in the software of the display unit, the Easy-Laser® E930 system can be expanded to suit your special needs, both now and in the future. You just add the appropriate accessories such as lasers, measuring units for shaft alignment and other fixtures. For detailed information, please see our other brochures.



TECHNICAL SPECIFICATIONS

Laser transmitter	
Type of laser	Diode laser
Laser wavelength	635–670 nm, visible red light
Laser Safety Class	Class 2
Output	< 1 mW
Beam diameter	6 mm [1/4"] at aperture
Working distance	40-metre [130']
Type of battery	1 x R14 (C)
Operating time/battery	approx. 15 hours
Operating temperature	0–50 °C
Laser adjustment	2 ways ±2° (± 35 mm/m)
Housing material	Anodized aluminium
Dimensions	WxHxD: 60x60x120 mm [2.36x2.36x4.72"]
Weight	700 g [24.7 oz]
Detector	
Type of detector	E9: 2 axis PSD 20x20 mm [0.78" sq] (E8: 1 axis PSD)
Resolution	0.001 mm [0.05 mils]
Measurement error	± 1% +1 digit
Inclinometers	0.1° resolution
Thermal sensors	± 1° C accuracy
Environmental protection	IP Class 67
Operating temperature	-10–50 °C
Internal battery	Li Po
Housing material	Anodized aluminium
Dimensions	∅ 45 mm, L=100 mm [∅ 1.77", L=3.94"]
Weight (excl. rod adapter)	180 g [6.3 oz]
Display unit	
Type of display/size	VGA 5.7" colour screen, backlit LED
Displayed resolution	0.001 mm / 0.05 thou
Power management	Endurio™ system for unbroken power supply
Internal battery (fixed)	Heavy duty Li Ion chargeable
Battery compartment	For 4 x R14 (C)
Operating time	Approx. 30 hours (at typical user cycle)
Temperature range	-10–50 °C
Connections	USB A, USB B, External, Easy-Laser® units, Network
Wireless communication	Class I Bluetooth® wireless technology
Internal memory	>100 000 measurements can be saved
Help functions	Calculator, Unit converter
Environmental protection	IP class 65
Housing material	PC/ABS + TPE
Dimensions	WxHxD: 250x175x63 mm [9.8"x6.9"x2.5"]
Weight (without batteries)	1080 g [2.4 lbs]

A complete system contains

- 1 Display unit E51
- 1 Laser transmitter D75
- 1 Detector E9*
- 1 Cable 2 m
- 1 Cable 5 m, extension
- 1 Bracket for D75 with magnets
- 1 Set of brackets for detector
- 1 Set of extension rods for detector
- 1 Target for extruder
- 1 Manual
- 1 Measuring tape 5 m
- 1 USB memory stick with EasyLink™ software
- 1 USB cable
- 1 Battery charger (100–240 V AC)
- 1 Hexagon wrench set
- 1 Shoulder strap for Display unit
- 1 Cleaning cloth for optics
- 1 CD with documentation
- 1 Carrying case

System Easy-Laser® E930, Part No. 12-0788

*Note: For the US market E7 is replaced with E4, 1 axis detector, and E9 replaced with E8, 1 axis detector.

Easy-Laser® is manufactured by Damalini AB, Alfagatan 6, 431 22 Mölndal, Sweden,
Phone +46 31 708 63 00, Fax +46 31 708 63 50, email: info@damalini.se, www.damalini.com
© 2013 Damalini AB. We reserve the right to make modifications without prior notification.
Easy-Laser® is a registered trademark of Damalini AB.
This product complies with: EN60825, 21 CFR 1040.10 and 1040.11
This device contains FCC ID: PVH0925, IC: 5325A-0925.



05-0733 Rev1



J.L. Griffin LLC.
4625-B Turtle Creek Drive,
Brookfield, WI 53005
TEL 414.218.8088
E-mail jim@jllgriffin.com